

4

3


2

1

B

B

Test locations 21 ft from range.

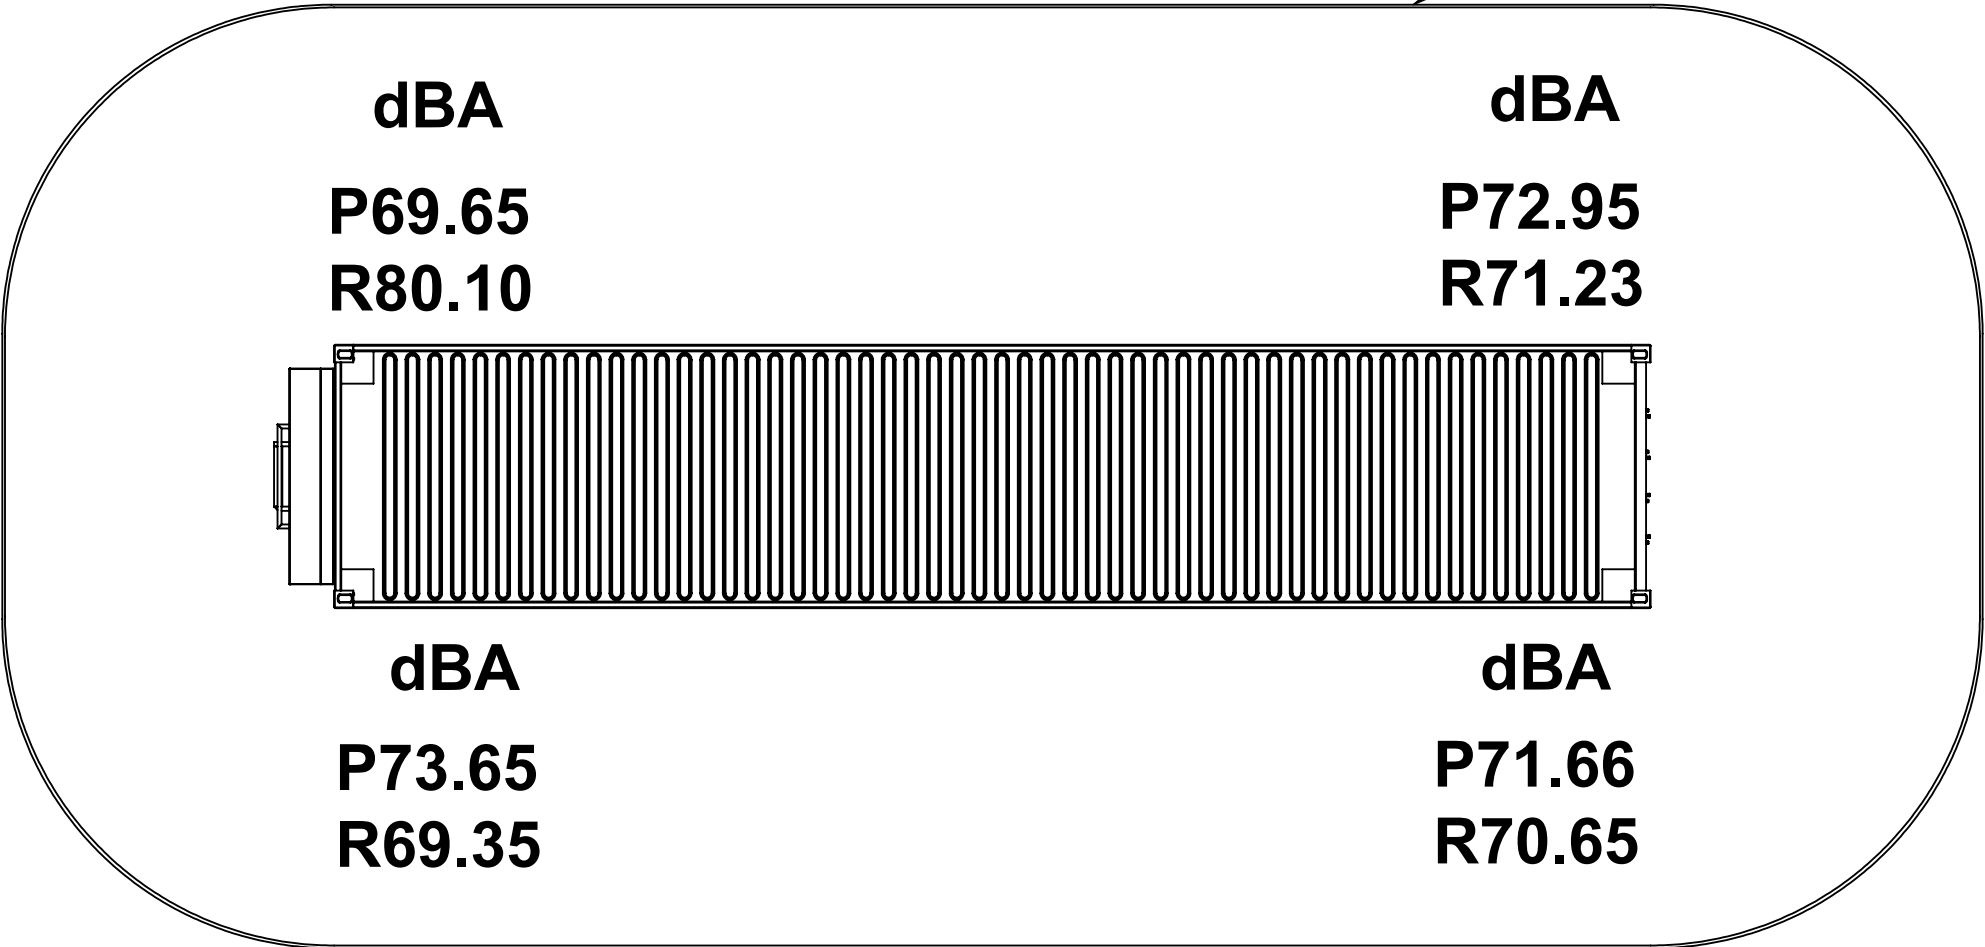

Add 3 dBa at 10'. Subtract 4dBa at 42'

A

A

Environmental Noise	dBA
Chain Saw	110
Lawn Mower	107
City traffic	85
Vacuum cleaner	75
Normal Conversation	60-70
Household refrigerator	55
Wisper	25

(P)9mm (R)223
Device used for test is Extech 407732
Frequency weighting A, High, Fast
Base line decibel of 58.4
Temprature of 90°F
47% Humidity

PROPRIETARY AND CONFIDENTIAL  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.		NAME	DATE	Mobile Range Technologies		
	DRAWN	TKM	8/21/24	TITLE:  Final Assembly		
	CHECKED					
	ENG APPR.					
	MFG APPR.					
	Q.A.					
MATERIAL Sound Foam W&C	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN METRIC TOLERANCES: X.X : ± 0.5 mm X.XX : ± 0.3 mm X.XXX : ±0.1mm			SIZE B	DWG. NO. MRT-FNLASY-SOUND TEST	REV A
FINISH N/A						
			SCALE: 1:128			
			WEIGHT:		SHEET 1 OF 1	

4

3

2

1